


SUMADOR DE MICRÓFONOS

2695

Módulo sumador-mezclador activo que permite la conexión y utilización simultánea de hasta cuatro micrófonos con salida simétrica, que pueden canalizarse hacia una sola entrada de micrófono. Con circuitería activa que mezcla las cuatro entradas simétricas sobre un nodo de suma virtual, por lo que la interacción entre las señales de cada uno de los micrófonos es nula.

Nivel nominal de entrada	4 simétricas de - 30 dBm a + 10 dB
Salida	1 simétrica
Alimentación	24 V CC (por pin 4 del conector de salida)
Consumo máximo	5 mA (sin micrófonos)
Impedancia de entrada	1,5k ohm (a 1 kHz), simétrica
Impedancia de salida	200 ohm simétrica
Dimensiones (mm)	144 x 82

Montaje empotrado (caja 2020) o en superficie (caja 2091)

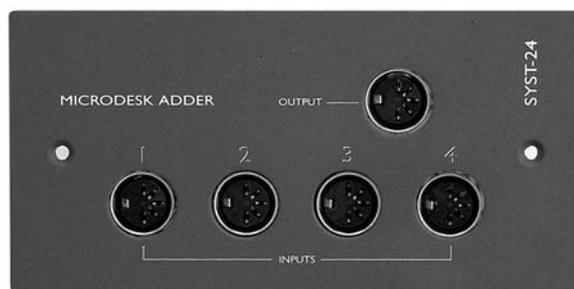

2695_ES

C/ Barcelona 101
17003 Girona (Spain)
(+34) 972 203 300

OPTIMUS
SOUND & COMMUNICATION

MICROPHONE ADDER

2695

Active mixer module that allows connection and simultaneous use of up to four microphones with balanced output, which can be sent to a single microphone input. With active circuitry that mixes the four balanced inputs on a virtual sum node, so that the interaction between the signals from each microphone is zero.

Nominal level audio inputs	4 balanced, from - 30 dBm to + 10 dB
Output	1 balanced
Power supply	24 V CC (by pin 4 of output connector)
Maximum consumption	5 mA (without microphones)
Input impedance	1,5k ohm (@ 1 kHz), balanced
Output impedance	200 ohm balanced
Dimensions (mm)	144 x 82

Flush mounting (box 2020) or surface mounting (box 2091)

