LOUDSPEAKERS

Metal Ceiling speaker, 6 W

A-266BTM » 6 W · 100 dB | White | Metal | EN54 Compliance

Ceiling loudspeaker for flush mounting 6" and 6 W RMS in 100 V line, with connections available at 3 W and 1.5 W (via transformer tabs selection) and optional fire dome. Circular metallic grille, white colour, with quick mounting by springs...






Technical specifications

Loudspeaker	6"
RMS power	6 W
Power selection	6, 3 & 1.5 W (100 V)
Frequency response	125 ~ 20,000 Hz
Sensitivity	92 dB SPL at 1 W
Sound Pressure	100 dB at 6 W
Impedance	1667 Ω, 3333 Ω & 6666 Ω
Cutout Size	Ø 170 mm
Dimensions (mm)	Ø 200 x 70 (depth)
Weight	0.720 kg
Finish	Metal, metallic grille
Mounting	Springs
Power selection	Transformer Taps

Frequency Response

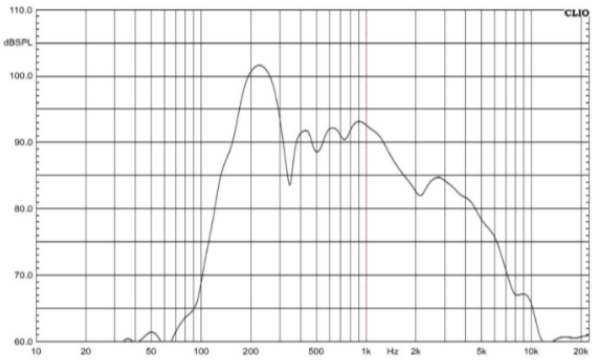

www.optimusaudio.com

OPTIMUS SOUND INNOVATION

C/ Barcelona 101
17003 Girona (Spain)
(+34) 972 203 300