

Altavoz de techo



A-223DEN » 6 W · 96 dB · EN 54


Altavoz de techo de 66 mm para montaje empotrado de 6 W de potencia RMS en línea de 100 V, con rejilla metálica sin marco y cubierta trasera metálica. Montaje rápido y sencillo mediante cierre de resorte con distancia de sujeción corta. Certificación EN 54-24.



Especificaciones técnicas

Potencia RMS	6 W
Selección de potencia 100 V	6 W, 3 W y 1,5 W
Impedancia	1,67 kΩ, 3,33 kΩ y 6,67 kΩ
Sensibilidad	88 dB SPL a 1 W IEC268-5
Presión Acústica	96 dB SPL a 6 W IEC268-5
Sensibilidad EN54-24	73,3 dB SPL a 1 W / 4 m
Respuesta en frecuencia	220 ~ 17.000 Hz
Cobertura 1kHz / 4kHz	180° / 127°
Temperatura de trabajo	-10°C ~ +55°C
Grado de protección	IP21
Orificio a empotrar	ø 90 mm
Dimensiones(mm)	ø 105 x 80
Peso	0,64 kg
Acabado	Metálico, caja y rejilla
Color	Blanco RAL 9016
Normativa	EN54

Dimensiones

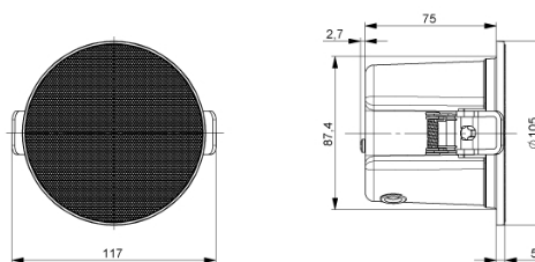

LOUDSPEAKERS

Ceiling speaker



A-223DEN » 6 W · 96 dB · EN 54

Ceiling loudspeaker for flush mounting with 6 W RMS power, 66 mm diameter, 100 V line, with frameless metal grill and metal rear cover. Fast and uncomplicated installation through spring snap lock with short clamping distance. EN 54-24 certification.



Technical specifications

Rated Power (RMS)	6 W
Power Taps	6 W, 3 W & 1.5 W
Impedance	1.67 kΩ, 3.33 kΩ & 6.67 kΩ
Sensitivity	88 dB SPL at 1 W IEC268-5
Sound Pressure	96 dB SPL at 6 W IEC268-5
Sensitivity EN54-24	73.3 dB SPL at 1 W / 4 m
Frequency Response	220 ~ 17,000 Hz
Dispersion 1kHz / 4kHz	180° / 127°
Temperature range	-10°C ~ +55°C
Protection degree	IP21
Cutout Size	ø 90 mm
Dimensions (mm)	ø 105 x 80
Weight	0.64 kg
Finish	Metallic, box and grid
Colour	White RAL 9016
Standard	EN54

Dimensions

